

SWITCHMODE PRECISION SERIES

ultra light weight power amplifiers



LX1600 · LX2200 · LX3000

SWITCHMODE PRECISION SERIES


ultra light weight power amplifiers

PHILOSOPHY

For decades, **DYNACORD** has been one of the leading manufacturers in the pro audio sector and has established a commanding position in the amplifier market thanks to the excellent audio performance, absolute reliability and high stability of the **Linear Precision series**.

SWITCHMODE TECHNOLOGY


The combination of an analogue **class-H** design with a state-of-the-art switching power supply has made possible the creation of a professional power amplifier delivering up to **2 x 1500 watts into 4 ohms** with excellent audio specifications but weighing only **8.7 kg**. Even complex loads as low as 2 ohms can be driven with absolute reliability. Amp racks containing several LX power amplifiers for active multi-way use are therefore easy to manipulate.

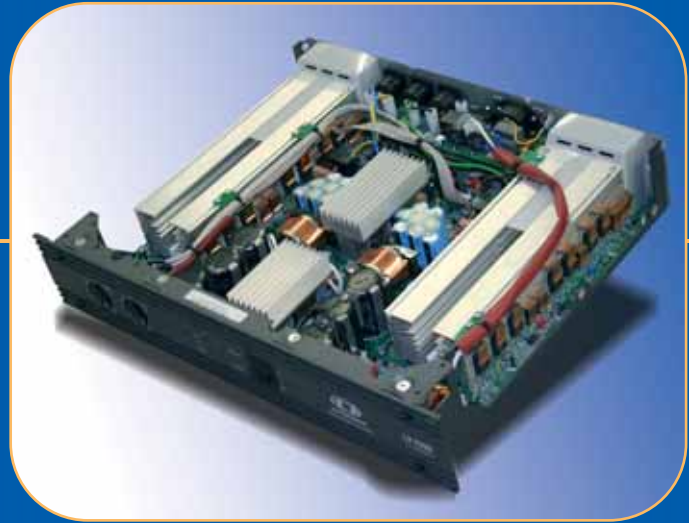

- Comprehensive set of protective circuits
- High-efficiency class-H design
- Switching power supply
- Extremely light and compact
- Dynamic audio limiter
- Highest reliability at 2 ohms
- 30% dynamic headroom
- Constant gain with 32dB
- Precise raster pots on the front panel


CLASS - H TECHNOLOGY

With this technology, two different power supply rails are permanently available internally to the power amplifier blocks. For most of the program material, the lower operating voltage is able to reproduce the audio signal flawlessly; however, as soon as there are dynamic peaks, the amplifier switches internally and at high speed to the higher supply voltage. Since for long periods the power amplifier blocks are operating with the lower supply voltage, there is considerably less power dissipation than with conventional class AB power amplifiers, which also means considerably less waste heat.

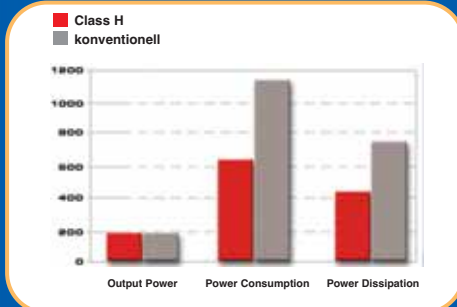


DYNAMIC LIMITERS

Dynamic limiters are general components in all DYNACORD power amplifiers. High-speed audio processors are continuously comparing the input signal to the output signal, and in the event of any non-linearity, the processors send control signals to the limiters, which operate dynamically upon the input level. As a result, the THD all the way up to 21 dBu is limited to an inaudible 1% max at the output.

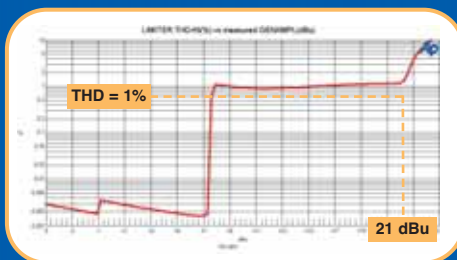

LPN + LO-CUT

The retrofitable **NRS 90268** kit, which is available as an option for all LX power amplifiers, combines the patented LPN (low-pass notch) filter with a low-cut filter. These eliminate transient non-linearities in the low frequency range in small to medium-sized full-range speakers and thereby considerably extend the reproducible range at the bottom end. The acoustic result is bass reproduction with more punch and greater substance.

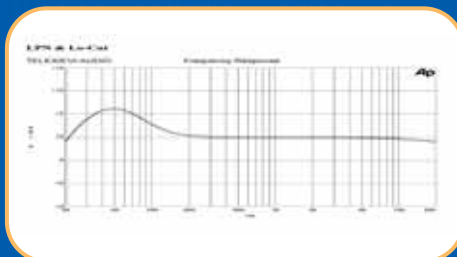

SWITCHMODE PRECISION SERIES

ultra light weight power amplifiers

FRONT

The dB-calibrated level controls are implemented as ultra-precise detent potentiometers that are recessed in the front panel to protect them from accidental contact. Power, Protect, Signal and Limit LEDs provide a quick overview of the operating status.



REAR

The electronically balanced XLR IN / OUT sockets are provided for direct operation with professional mixing consoles and signal processors. All the models in the LX series are designed for a Constant Gain of 32 dB. The power outputs for Channels A and B are on Speakon connectors. A Ground Lift switch is also provided to separate the chassis ground from the signal ground in order to eliminate ground loop hum.



LX1600

With an output rated at 2 x 1300 watts into 2 ohms and 2 x 800 watts into 4 ohms, this is the ideal power amplifier for small to medium-sized full-range cabinets and MF/HF components in active multi-way systems.



LX2200

With a stable output of 2 x 1600 watts into 2 ohms and 2 x 1100 watts into 4 ohms, this is the ideal amplifier for professional multi-way components as well as medium-sized subwoofers in concert sound systems.



LX3000

The new flagship of the LX series delivers a mighty 2 x 2100 watts into 2 ohms and 2 x 1500 watts into 4 ohms and therefore has plenty of headroom for large subwoofer arrays.



SAFETY PACKAGE

The complete LX series is equipped with protections against overheating, overloading, short-circuits, DC and HF as well as a Back-EMF protection. With the Soft Start system, the power out-

puts are switched on via a relay when a safe operational state has been reached and a power-up delay prevents the mains fuses being activated.

SWITCHMODE PRECISION SERIES

ultra light weight power amplifiers

TECHNICAL SPECIFICATIONS

| | LX1600 | | | LX2200 | | | LX3000 | | |
|---|---|--------|--------|-----------------------|--------|--------|-----------------------|--------|--------|
| Load Impedance | 2 ohms | 4 ohms | 8 ohms | 2 ohms | 4 ohms | 8 ohms | 2 ohms | 4 ohms | 8 ohms |
| Max. Midband Output Power THD = 1%, 1kHz | 1300 W | 800 W | 500 W | 1600 W | 1100 W | 600 W | 2100 W | 1500 W | 900 W |
| Rated Output Power THD < 0.1%, 20Hz ... 20kHz | ---- | 700 W | 350 W | ---- | 900 W | 450 W | ---- | 1200 W | 600 W |
| Max. Single Channel Output Power Dynamic Headroom, IHF-A | 2200 W | 1200 W | 625 W | 2600 W | 1400 W | 720 W | 2900 W | 1800 W | 1000 W |
| Max. Single Channel Output Power Continuous, 1kHz | 1700 W | 1000 W | 550 W | 2100 W | 1300 W | 660 W | 2600 W | 1700 W | 950 W |
| Max. Bridged Output Power THD = 1%, 1kHz | ---- | 2600 W | 1600 W | ---- | 3200 W | 2200 W | ---- | 4200 W | 3000 W |
| Maximum RMS Voltage Swing THD = 1%, 1kHz | 72 V | | | 78 V | | | 95 V | | |
| Power Bandwidth, ref. 1kHz THD = 1%, half power @ 4 ohms | 10Hz ... 60kHz | | | | | | | | |
| Voltage Gain, ref. 1kHz | 32.0 dB | | | | | | | | |
| Input Sensitivity rated power @ 8 ohms, 1kHz | +4.7 dBu (1.33 V rms) | | | +5.8 dBu (1.51 V rms) | | | +7.0 dBu (1.74 V rms) | | |
| THD at rated output power MBW = 80kHz, 1kHz | < 0.05% | | | | | | | | |
| IMD-SMPTE, 60Hz, 7kHz | < 0.02% | | | | | | | | |
| DIM 30, 3,15kHz, 15kHz | < 0.05% | | | | | | | | |
| Maximum Input Level | +22 dBu (9.76 V rms) | | | | | | | | |
| Crosstalk ref. 1kHz, at rated output power | < -80 dB | | | | | | | | |
| Frequency Response, ref 1kHz | 15Hz ... 40kHz (-1dB) | | | | | | | | |
| Input Impedance, active balanced | 20 kohms | | | | | | | | |
| Damping Factor, 1kHz | > 300 | | | | | | | | |
| Slew Rate | 30 V/μs | | | 35 V/μs | | | 38 V/μs | | |
| Signal to Noise Ratio, A-weighted | 107 dB | | | 107 dB | | | 108 dB | | |
| Output Stage Topology | Class H | | | | | | | | |
| Power Requirements | 100V, 120V, 220V, 230V, 240 V; 50Hz ... 60Hz (factory configured) | | | | | | | | |
| Power Consumption 1/8 max. output power @ 4 ohms | 625 W | | | 850 W | | | 1070 W | | |
| Protection | Audio Limiters, High Temperature, DC, HF, Back-EMF, Peak current Limiters Inrush Current Limiters, Turn-On delay | | | | | | | | |
| Cooling | Front-to rear, 3-stage fans | | | | | | | | |
| Ambient Temperature Limits | +5° ... +40° (40°F ... 105°F) | | | | | | | | |
| Safety Class | I | | | | | | | | |
| Dimensions (W x H x D) mm | 483 x 88,1 x 384 | | | | | | | | |
| Weight | 7.80 kg (17.2 lbs) | | | 8.15 kg (18.0 lbs) | | | 8.70 kg (19.2 lbs) | | |
| Optional Accessories: | | | | | | | | | |
| Rear Rackmount 15.5" | D112 930 (RMS15-CL) | | | | | | | | |
| Rear Rackmount 18.0" | D112 933 (RMS18-CL) | | | | | | | | |
| LPN + Lo-Cut Filter | D112963 (NRS 90268) | | | | | | | | |

Americas

Telex Communications Inc.
12000 Portland Ave South,
Burnsville, MN 55337, USA

USA: Phone: 1-800-392-3497
Fax: 1-800-955-6831

Canada: Phone: 1-866-505-5551
Fax: 1-866-336-8467

Latin America: Phone: 1-952-887-5532
Fax: 1-952-736-4212

Europe, Africa & Middle-East

Germany: EVI Audio GmbH,
Hirschberger Ring 45,
D-94315 Straubing, Germany
Phone: +49 9421 706-0
Fax: +49 9421 706-265

France: EVI Audio France S.A.,
Parc de Courcerin,
Allée Lech Walesa,
F 77185 Lognes, France
Phone: +33 1-6480-0090
Fax: +33 1-6006-5103

UK: Shuttlesound,
4 The Willows Centre,
Willow Lane, Mitcham,
Surrey CR4 4NX, UK
Phone: +44 208 646 7114
Fax: +44 208 254 5666

Asia & Pacific Rim

Japan: EVI Audio Japan Ltd.
5-3-8 Funabashi, Setagaya-Ku,
Tokyo, Japan 156-0055
Phone: +81 3-5316-5020,
Fax: +81 3-5316-5031

China: Telex EVI Audio (Shanghai) Ltd.
Room 2210-2215,
Tower B, Far East International

Plaza No. 317, Xianxia Road,
Shanghai, China, PC: 200051
Phone: +86 (21) 6235-1677
Fax: +86 (21) 6235-1676

Hong Kong: Telex EVI Audio (HK) Ltd.
Unit 5,1/F, Topsail Plaza
11 On Shum Street
Shek Mun, Shatin HK
Phone: +852 2351-3628
Fax: +852 2351-3329

Singapore: Telex Pte. Ltd.
3015A Ubi Road 1, 05-10
Kampong Ubi Industrial

Estate,
Singapore 408705
Phone: +65 6746-8760
Fax: +65 6746-1206

 **DYNACORD**®