

**Design without Boundaries
Performance Without Limits**

Loudspeakers; amplifiers; signal processors; audio and control networks. SYGMA brings them all together to create a new kind of sound system, a new level of performance. World-class European transducers are paired with our advanced Complex Conic horns for audiophile reproduction that makes performances and audiences truly come alive. PF Series Intelligent Digital Amplifiers can connect to RHAON, the Renkus-Heinz Audio Operations Network. RHAON gives you complete control of digital audio distribution, loudspeaker processing and system management.

The global SYGMA development and manufacturing process delivers unsurpassed quality and innovation, for performance and style that will make you proud and durability that will keep you sounding great. Before we'll ship them, your loudspeakers have to meet our exacting requirements,

Applications

- Virtually any application where size is important and high output and outstanding sonic performance are required.
- Ideal for multi-channel playback systems in clubs and disco's (with optional subwoofers.)
- Distributed sound reinforcement systems in sports arenas and stadiums.
- Side fill loudspeakers in sound reinforcement systems.
- High output floor monitors in live sound venues



PF Series Intelligent Amplifiers

Passive, powered or networked, you can choose the system configuration that meets your needs at any time. At the factory or in the field, the SGX passive connector plate can be easily replaced by one of five PF Series intelligent Class D digital amplifiers. The PF series light weight switching power supplies are over 70% efficient at full output. Their high efficiency reducing AC power requirements and eliminating the need for a cooling fan.




Whenever you are ready for Ethernet audio networking, your Sygma loudspeakers are, too; just replace the connector plate or the PF series amplifier with a RHAON empowered amplifier equipped for connection to the Renkus-Heinz Audio Operations Network. RHAON empowers you with full control over digital audio distribution, speaker-specific DSP and control/monitoring – all using standard Ethernet hardware and cable.

If you need an outstanding high-power 15-inch 2-way system, order the SGX151. For full range nearfield applications, the SG151-2 with a 200 Watt PF1-200 is a logical choice. For stage monitoring and other ultra-demanding applications, order the SG151-52R: it's bi-amped with 500 / 200 watt Class D amplifiers and RHAON empowered. If you need Ethernet-based audio operations networking, order the SG151-2R, SG151-5R or the SG151-52R; all are RHAON empowered.

**SG151 Series
Self-Powered
SGX151
Non-Powered**

**15" WOOFER +2" HF
2-WAY LOUSPEAKER SYSTEMS**

**PASSIVE : POWERED : NETWORKED
YOUR CHOICE**

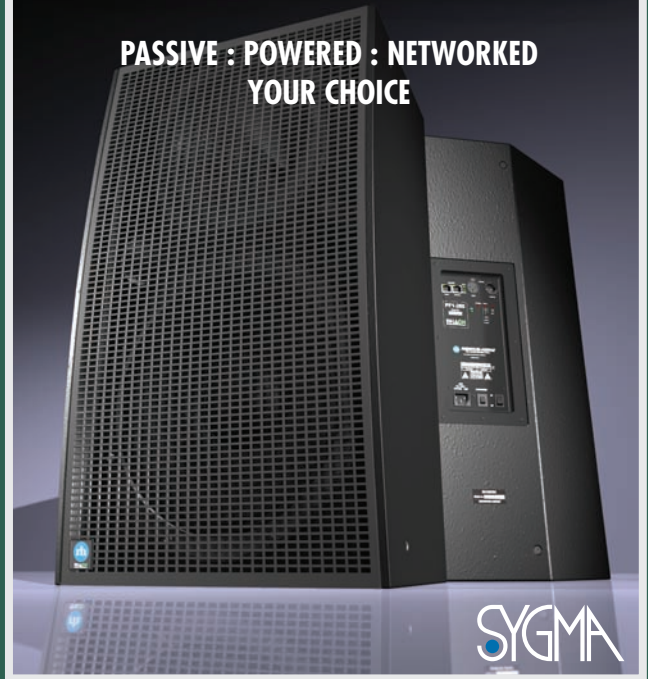

• Compact Multi-Function Design

Outstanding, full-range ± 3 dB, 60 Hz to 18 kHz performance in an extremely compact, space-saving design.

• Flexible Input Configurations

Choose passive inputs, or go self-powered with the PF series intelligent amplifiers, either single-channel or bi-amped, with or without RHAON networking.

• RHAON Audio Operations Network

All self-powered SG151 series cabinets are available with RHAON for flexible digital signal distribution, loudspeaker management and control.

• Exclusive 90° by 40° Complex Conic Design

Provides constant beamwidth/directivity without the problems of conventional rectangular horns; can be rotated 90° within the cabinet for wide or deep listening spaces.

• 2" Extended Range Titanium HF Driver

Provides smooth, low distortion high frequency performance to 18 kHz and beyond.

• Heavy-Duty 15" Woofer

Easily handles 700 Watts of program power.

Technical Information

SENSITIVITY: SG151: 1.0 V for rated power output
SGX151: 99 dB (1W/1m)
MAXIMUM SPL: SG151-5/5R/52R: 125 dB pgm, 128 dB peak
SG151-2R: 121 dB pgm, 124 dB peak
SGX151: 127 dB pgm, 130 dB peak
DISPERSION: 90° H by 40° V
FREQ. RESP: ± 3 dB, 60 Hz to 18 kHz
HF DRIVER: 2" Titanium driver, model SSD202-8
40 W RMS, 80 W program
LF DRIVER: 15" woofer; model SSL15-6, 1" VC;
350 W RMS @ 4 Ohms, 700 Watts pgm
ENCLOSURE: 13-ply hardwood, perforated metal grille
FINISH: Black or white paint

POWER : SG151 series: See amplifier specs.
SGX151: 700 Watts program at 4 Ohms

CONNECTORS: SG151 series; See amplifier specs
SGX151: Screw terminals & looping 4-pin
Neutrik SpeakOn style connectors

HARDWARE: 12-point univ. mtg. hdw.
U-bracket attachment points

DIMENSIONS: 29 1/4" H x 17 1/2" W x 15 1/2" D
(74.3 cm x 44.5 cm x 39.4 cm)

NET WEIGHT: SGX151 - 50 Lbs. (22.7 Kg)
SG151-5/5R - 54 Lbs. (24.5 Kg) net
SG151-52R - 56 Lbs. (25.4 Kg) net
SG151-2/2R - 52 Lbs. (23.6 Kg) net

PF1-200 & PF1-500 Amplifiers

POWER: PF1-200: 200 W RMS @ 4 Ohms, 300 W Burst
PF1-500: 500 W RMS @ 4 Ohms, 500 W Burst
FREQ. RESP: +0.0, -5 dB, 20 Hz to 20 kHz
THD DISTORTION: < 0.02% typical
HUM & NOISE: < 100 dB (A weighted)
DAMPING: > 100
INPUT: 10K Ohm balanced differential
SENSITIVITY: 1.0 V for RPO
CMR: 74 dB
CONTROLS: Gain (screwdriver adjustable)
POWER: Power: EC Power connector

CONNECTORS: Input: Looping XLR; female in, male out (pin 1 chassis, pin 2 +, pin 3 -)

POWER: Universal 90-260 VAC, 50/60Hz.
PF1-200: 2.4 A @ 120 V, 1.2 A @ 240 V
Idle current: 200 mA @ 120 V;
100 mA @ 240 V
Max inrush current: 1 A
PF1-500: 5 A @ 120 V, 2.5 A @ 240 V
Idle current: 400 mA @ 120 V;
200 mA @ 240 V
Max inrush current: 1 A

PF1-200R & PF1-500R RHAON Empowered Amplifiers

The PF1-200R & PF1-500R are identical to the PF1-200 & PF1-500 except for the addition of the RHAON Network Interface; additional capabilities include:

INPUTS: Cobranet; dual RJ45 connectors; accept
Cat e5 copper cable.
AES/EBU; Phoenix connectors
Analog; Phoenix connectors

DIGITAL FORMAT: 16 or 24 bit PCM; 48 or 96 kHz sample rate;
selectable Network Latency.

PROTECTION: Soft & Peak Limiting, Excursion Control &
Thermal Regulation

For additional details on the RHAON Audio Operations Network, refer
to Renkus-Heinz brochure # RH 606

PF2-500R RHAON Empowered BiAmplifier

The PF2-500R is a RHAON empowered 500/200 Watt biampifier. It
is identical to the PF1-500R except for also having a 200 Watt HF
amplifier and associated electronic crossover.

POWER: 6 A @ 120 V, 3 A @ 240 V
Idle current: 500 mA @ 120 V;
250 mA @ 240 V
Max inrush current: 1 A

Note: All analog inputs and outputs comply with AES Standard 45-2005 on interconnecting, grounding and shielding.

SYGMA

Note:

The UMH (Universal Mounting Hardware) attachment points have #6 metric threads and are positioned 1 3/4" from the edges unless otherwise indicated.

The rear view of a SGX151 is shown. The enclosure is shown without its metal grille.

For more detailed dimensional information, please refer to the 2D and 3D drawing files on our website, www.renkus-heinz.com

