

Opus 55 Mk II Condenser Microphone



FEATURES

- High performance miniature condenser microphone (omnidirectional)
- Splash-proof capsule design
- Lightweight adjustable neckband
- Ultra-slim flexible gooseneck for easy positioning
- Gooseneck can be mounted on the left or right hand side of the neckband
- Extremely flexible yet rugged construction
- Versions available for use with wireless transmitter

APPLICATIONS

The Opus 55 Mk II is designed to suit all applications which call for a high quality, lightweight and low profile microphone which leaves the hands free, making it ideal for singing drummers, keyboard players, etc. It is suitable for wireless operation in applications such as aerobics instruction, theatre stage work and education. Featuring small ear loops and flexible yet rugged construction, the Opus 55 Mk II is also suited for people who wear glasses.

VERSIONS

Opus 55.09 Mk II BLK	Omnidirectional neckworn microphone, bare-ended cable, black	Order # 475.556
Opus 55.09 Mk II SC	same as above, but beige coloured	Order # 475.564
Opus 55.18 BLK	Omnidirectional neckworn microphone, cable with 4-pin Mini-XLR plug, black	Order # 475.394
Opus 55.18 Mk II SC	same as above, but beige coloured	Order # 475.386

OPTIONAL ACCESSORIES

CV 18	Phantom power adapter for the .18 version	Order # 475.378
WS 55	Wind screen for Opus 55 Mk II and MCE 55	Order # 468.975

Germany

Theresienstr. 8
D-74072 Heilbronn
Tel. +49 (0)71 31 / 6 17-0
Fax +49 (0)71 31 / 617-224
E-mail: info@beyerdynamic.de
Internet: www.beyerdynamic.de

United States

56 Central Ave.
Farmingdale, NY 11735
Tel. +1 (631) 293-3200
Fax +1 (631) 293-3288
E-mail: salesUSA@beyerdynamic-usa.com
Internet: www.beyerdynamic-usa.com

Great Britain



17 Albert Drive
Burgess Hill RH15 9TN
Tel. +44 (0)1444 / 258 258
Fax +44 (0)1444 / 258 444
E-mail: sales@beyerdynamic.co.uk
Internet: www.beyerdynamic.co.uk

TECHNICAL SPECIFICATIONS

Transducer type	Condenser (electret)
Operating principle	Pressure
Polar pattern	Omnidirectional
Frequency response	20 - 20,000 Hz
Open circuit voltage	4.5 mV/Pa
Nominal impedance	1 k Ω
Max. SPL	130 dB SPL
Signal-to-noise ratio rel. to 1 Pa	56 dB
Supply voltage	1.5 to 9 V
Connection	4-pin Mini XLR plug (Opus 55.18 Mk II) or bare-ended cable (Opus 55.09 Mk II)
Dimensions	Head diameter: 5.2 mm Length: 13 mm Cable length: 1.2 m
Weight	
without cable / plug	16 g
with cable / plug	24 g

FREQUENCY RESPONSE & POLAR PATTERN

This polar pattern and frequency response curve (measuring distance ± 3 dB) correspond to a typical production sample for this microphone.

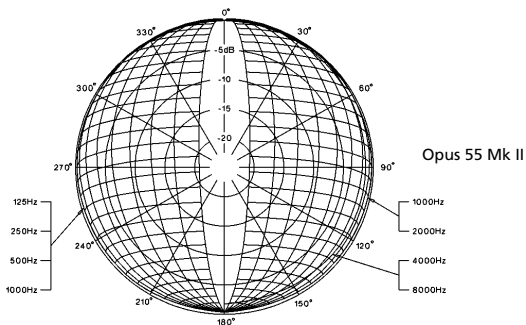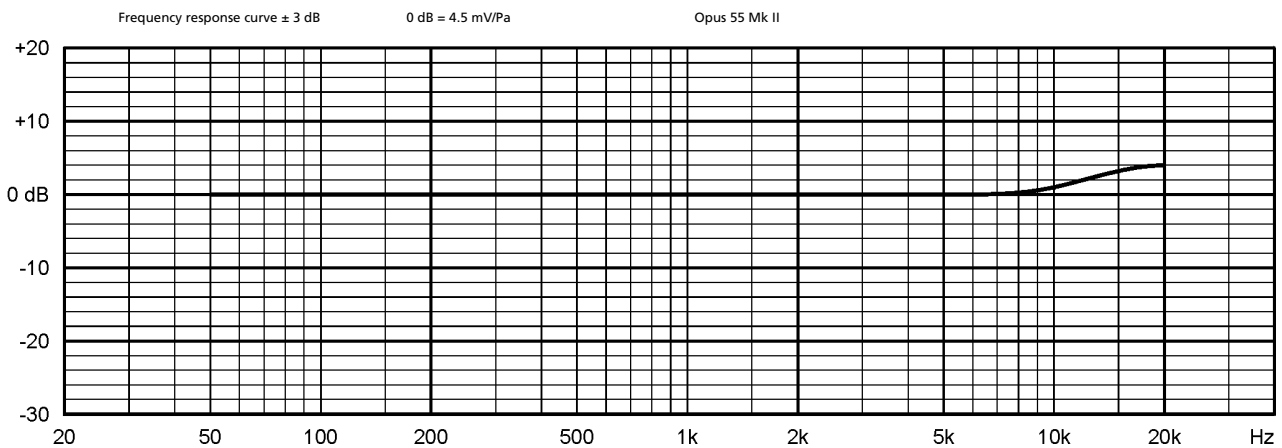

WIRING DIAGRAM

