



CC 12 CHARGING AND TRANSPORT CASE

Order # 486.264



FEATURES

- Modular case to accommodate the microphone units, charging electronics and discussion control unit
- Integrated power supply unit for charging 1 to 10 microphone units
- Simultaneous charging of all batteries without a previous discharge being necessary
- Window to observe the charging status

DESCRIPTION

The CC 12 is a modular charging and transport case. The basic version consists of a cover (CT 10), a charging unit (CD 12) for 10 microphone units and a bottom with casters (CW 10). The MCW-D 50 discussion control unit can be accommodated in the empty compartment (CS 10). Each charging unit has 10 compartments for the microphone units. On both sides there are handles for comfortable carrying. It is recommended to use not more than two CD 12 charging units on top of each other, because the top might become too heavy.

The body of the case is made of plywood with a washable foil inside and grey laminate outside. The coloured surface is flecked with grey. The case is equipped with ball bearing casters with a diameter of 80 mm. Two of the casters are equipped with brakes. Silver anodised aluminium profiles protect the edges from shocks and ensure an exact fitting of the individual sections. There are four locking chromium-plated automatic locks per section.

For charging the microphone units are put into the charging facilities. Shock-mounted charging contacts ensure the electric connection between microphone unit and power supply unit. All batteries are charged simultaneously. After approximately 2 hours the battery is fully charged, depending on the previous use. The charging state of the batteries is indicated by the LED ring of the gooseneck microphone and can be seen from the outside through a window or when the cover is opened. To avoid a self-discharge of the batteries, trickle charging is carried out. So each microphone unit has its full capacity at any time. Therefore, beyerdynamic recommends the charger being connected to the mains permanently.

Germany

Theresienstr. 8
D-74072 Heilbronn
Tel. +49 (0)71 31 / 6 17-0
Fax +49 (0)71 31 / 617-224
E-mail: info@beyerdynamic.de
Internet: www.beyerdynamic.de

United States

56 Central Ave.
Farmingdale, NY 11735
Tel. +1 (631) 293-3200
Fax +1 (631) 293-3288
E-mail: salesUSA@beyerdynamic.com
Internet: www.beyerdynamic.com

Great Britain

17 Albert Drive
Burgess Hill RH15 9TN
Tel. +44 (0)1444 / 258 258
Fax +44 (0)1444 / 258 444
E-mail: sales@beyerdynamic.co.uk
Internet: www.beyerdynamic.co.uk

ARCHITECT'S SPECIFICATIONS

Charging and transport case for up to 10 microphone units. Can be extended with more charging units for 10 microphone units each, empty compartments and control unit. Microphone section with handles. Body of the case made of plywood. Washable foil inside. Grey laminate outside. Coloured surface flecked with grey. Ball bearing casters; two of the casters are with brakes. Silver anodised aluminium profiles. Locking automatic locks per section. Shock-mounted charging contacts. LED ring of the gooseneck microphone indicates the charging status. Simultaneous charging of all batteries in the microphone units with a max. time of 2 hours for an empty battery. Dimensions (LxWxH): 757x370x668mm.

Manufacturer: beyerdynamic
Type: CC 12

Empty compartment. Inside with formed foam material for 19" devices with a height of max. 3 HU. Coloured surface flecked with grey. Silver anodised aluminium profiles. Locking automatic locks. Dimensions (LxWxH): 757x370x324mm.

Manufacturer: beyerdynamic
Type: CS 10

19" mounting compartment, 6 HU. To accommodate 19" devices. With integrated passive ventilation panels. Movable 19" profile bars for flush or moved mounting. Cover is available as an option. Coloured surface flecked with grey. Silver anodised aluminium profiles. Locking automatic locks. Dimensions (LxWxH): 757x370x451mm.

Manufacturer: beyerdynamic
Type: CM 10

TECHNICAL SPECIFICATIONS


CD 12 Charger for CC 12

Power supply 100 - 240 V AC ~, 50 / 60 Hz
Fuse at the mains socket 2 x 6.3 A (slow blow)
Power consumption max. 150 W
Max. ambient temperature +10° - +40°C when charging (< 90% atmospheric humidity)
Storage temperature -20° - +55°C
Charging unit 10 microphone units parallel
Charging time max. 2 hours when the battery is completely empty
Dimensions (L x W x H) 757 x 370 x 451 mm
Weight (without microphone units) 12 kg

DIMENSIONS

CC 12 Case

Height depends upon the number of modular units
 Length 757 mm
 Width 370 mm

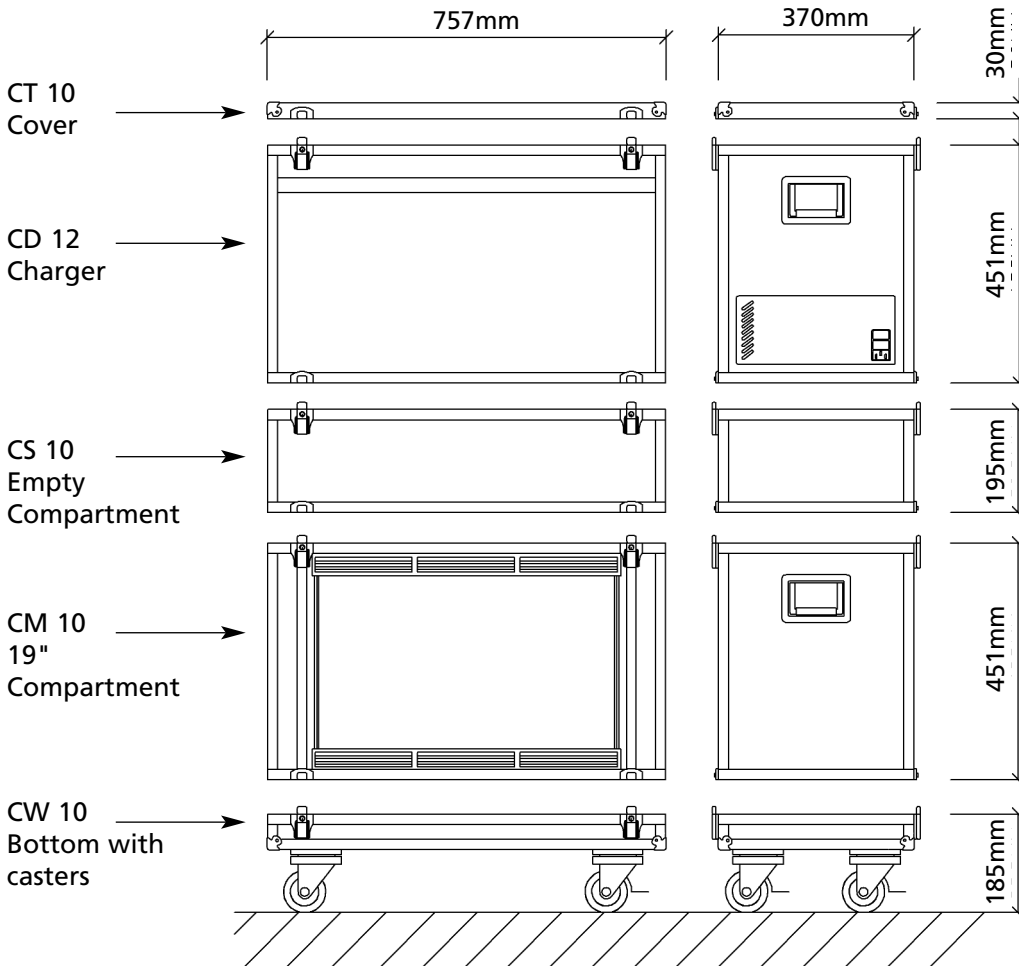

OPTIONAL ACCESSORIES

CC 12	Charging case for 10 MCW-D 5** microphone units, consisting of CT 10 top cover, CD 10 charger, CW 10 bottom with casters	Order # 486.264
CD 12	Charger for 10 MCW-D 5** microphone units	Order # 486.256
CM 10	19"-compartment for MCW-D 50 control unit.	Order # 479.810
CS 10	Empty compartment for MCW-D 50 control unit	Order # 479.780
CT 10	Top cover.	Order # 479.799
CW 10	Bottom with casters.	Order # 479.802