



RENKUS-HEINZ
ADVANCING SOUND. PROVIDING SOLUTIONS.

**Commanding Performance,
Compelling Value**

Sound that makes performances and audiences truly come alive doesn't come easy. But CF & CFX Series loudspeakers put the power of unique Renkus-Heinz developments like Complex Conic horns to work for you. Optional intelligent amplification, versatile enclosure designs, go-anywhere hardware and rugged construction help solve your sound reinforcement challenges easily and quickly.

Every CF & CFX Series loudspeaker is engineered by Renkus-Heinz to unrivaled standards of quality and innovation. Before we'll ship them, your loudspeakers have to meet our exacting requirements, for performance that will make you proud and durability that will keep you sounding great.

Applications

- Virtually any application where size is a critical issue and outstanding sonic performance is required.

Permanent Installations

- Ideal for fills, delays, distributed and playback systems
- Churches, schools, sports venues, board rooms, malls, transportation venues, retail environments

Portable Applications

- Ideal solution for portable, compact, full-range sound reinforcement requirements.
- Performing artists, rental A/V, schools, churches, etc.

Advanced Complex Conic Horn Design



Designed around the spherical expansion of the acoustic pressure wave, Complex Conic horns provide constant beamwidth/directivity without the problems of conventional rectangular horns. With extended pattern bandwidth, lower distortion and minimal coloration, Complex Conic horns work better and sound far more natural than ordinary horns.

PF-1 Integral Amplifier

All CF Series loudspeakers are equipped with the PF-1 Class D Digital amplifier/signal processor that combines amplification, crossovers, protection and equalization into a single compact unit.



Powered by a switching power supply, the PF-1 is light weight and over 70% efficient at full output. Its high efficiency reduces power requirements and eliminates the need for fan cooling.

Non-powered CFX loudspeakers can easily be upgraded to self-powered CF loudspeakers by replacing the connector plate with the PF-1 amplifier module.

CF81
Self-Powered

CFX81
Non-Powered

**COMPACT 8" - 1" HF
2-WAY COMPLEX CONIC
LOUDSPEAKERS**



• Miniaturized Design

Outstanding, full-range 80 Hz to 20 kHz performance in an extremely compact, space-saving design.

• Exclusive Complex Conic Design

Complex Conic horn provides superior pattern control with low distortion.

• Wide-Angle 150° by 60° Coverage

Complex Conic horn provides smooth 150° by 60° coverage, may be rotated 90° within cabinet.

• 1" Extended Range Titanium HF Driver

Provides smooth, low distortion high frequency performance to 20 kHz and beyond.

• Heavy-Duty 8" Woofer

Easily handles 200 Watts of program power.

• Built-in Crossover


Includes EQ and high frequency protection; in CFX models eliminates need for a separate electronic crossover and bi-amplification.

Technical Information

SENSITIVITY – CF81:	1.0 V for rated power output	POWER – CF81:	115 V AC or 230 V AC
CFX81:	96 dB (1W/1m)	CFX81:	200 Watts program at 8 Ohms
MAXIMUM SPL:	114 dB program, 117 dB peak	CONNECTORS – CFX81:	Screw terminals & looping Neutrik 4-pin SpeakOn style connectors
DISPERSION:	150° H by 60° V	FINISH:	Black
FREQUENCY RESPONSE:	80 Hz to 20 kHz	HARDWARE:	6-point univ. mtg. hdw. U-bracket attachment points Tripod socket
HF DRIVER:	1" SSD140-8F Titanium driver, 15 W RMS, 30 W program	DIMENSIONS:	19 7/8" H x 11 1/8" W x 12 1/4" D (50.5 cm x 28.2 cm x 31.1 cm)
LF DRIVER:	8" model SSL8-13F woofer, 2" VC, treated fiber cone; 100 W RMS @ 8 Ohms, 200 Watts program	NET WEIGHT – CF81:	27.2 Lbs (12.3 Kg) net
ENCLOSURE:	Plywood, perforated metal grille	CFX81:	25.2 Lbs (11.4 Kg) net

PF-1 Amplifier

POWER RATING:	200 Watts RMS @ 4 Ohms, 300 Watts Burst	CONNECTORS INPUT	Looping XLR; female in, male out (pin 1 chassis, pin 2 +, pin 3 -)
FREQUENCY RESPONSE:	+0.0, -.5 dB, 20 Hz to 20 kHz	POWER:	IEC power connector
THD DISTORTION:	< 0.02% typical	CONTROLS:	Gain (screwdriver adjustable)
HUM & NOISE:	<100 dB (A weighted)	POWER REQUIREMENTS:	Universal 90–260 VAC, 50/60Hz. 2.4 A @ 120 V, 1.2 A @ 240 V
DAMPING INPUT:	>100 10K Ohm balanced differential	Idle Current:	200 mA @ 120 V; 10 mA @ 240 V
INPUT SENSITIVITY: COMMON MODE REJECTION:	1.0 V for RPO 74 dB	Max Inrush Current:	1 A

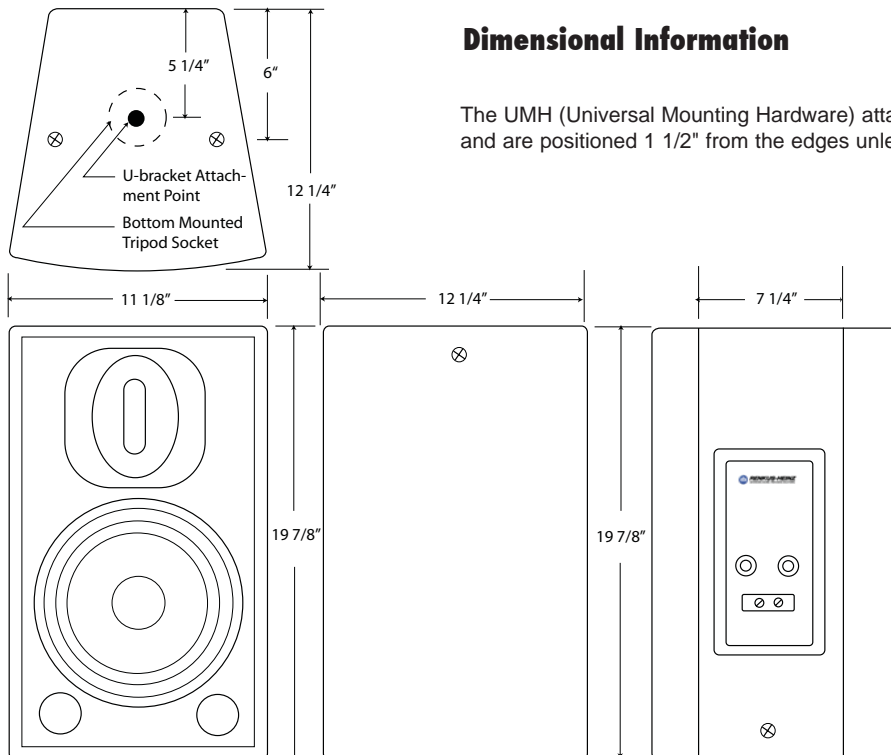

Dimensional Information

The UMH (Universal Mounting Hardware) attachment points have #6 metric threads and are positioned 1 1/2" from the edges unless otherwise indicated.

Note:
The rear view of a CFX81 is shown. The enclosure is shown without its metal grille.

For more detailed dimensional information, please refer to the 2D and 3D drawing files on our website, www.renkus-heinz.com



RENKUS-HEINZ
ADVANCING SOUND. PROVIDING SOLUTIONS.

Renkus-Heinz, Inc., 19201 Cook Street, Foothill Ranch, CA 92610-3501, USA
Tel: 949-588-9997 Fax: 949-588-9514 Email: Sales@renkus-heinz.com
Web: www.renkus-heinz.com